



General VRLA Battery

9FM12 (18V12Ah)

The LONGWAY General Series small batteries (less than 24Ah) are designed and developed using AGM technology and valve controlled sealing technology. They can meet conventional performance requirements, with a designed float charging life of over 5 years. The valve controlled non-spillable structure design allows safe use in any direction and is certified by sea and air freight. The battery performance also meets international standards, such as IEC61056-2012, JIS C8702-1-2003, UL1989, etc.



General Feature

- High reliability, safe without leakage, can be used in any position
- Excellent recovery performance after deep discharge
- Environmentally friendly products.
Meet EU battery directive RoHS and REACH standards
- Maintenance free
- Widely applicable temperature range, can be used at -20 °C~60°C
- Low self-discharge rate. The average monthly self-discharge rate of the battery is less than 2.5%
(It is recommended to recharge after storage for 6 months or before use)


Applications

- Emergency lights; Alarm system
- Electrical test equipment; communication Equipment
- Uninterruptible power supply; Fire & Security
- Electric toys; Control instruments
- Portable Movie & Video lights
- Electric tools; Solar system
- Robots and control machines and other

Performance

Nominal Voltage	18V (9cells)
Capacity	@25°C
20hr Rate (0.60A)	12.6Ah @ to 1.75V/cell
3hr Rate (3.00A)	9.00Ah @ to 1.70V/cell
27min Rate (12.0A)	7.60Ah @ to 1.60V/cell
Weight	Approx (4.90±3%)kg (10.8lbs)
Internal Resistance	Approx 22.0mΩfully charged @25°C
Maximum Discharge Current	120A(3sec)
Terminal	F2
Operating Temperature Range	Discharge:-20°C~60°C; Charge:0°C~50°C Storage:-20°C~40°C
Container Material	ABS(UL94 HB)/UL94-V0 Optional

Dimensions

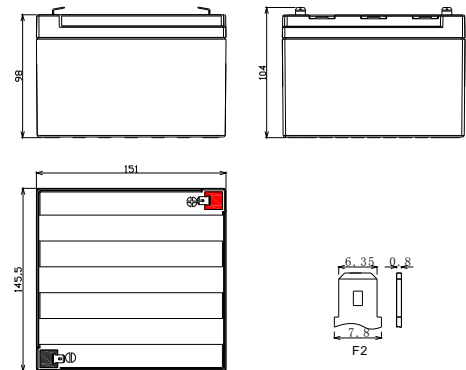

Length	151.0mm	5.94inch
Width	145.5mm	5.73inch
Height	98.0mm	3.86inch
Total height	104.0mm	4.09inch

Battery use

Cycle use

1. Limit the initial charging current to no more than 3.6A
2. Keep charging voltage at 21.6-22.5V/unit.and continue charging at least 3 hours after the charging current reduces to 0.24A to ensure full charge
3. The compensation coefficient of charging voltage and temperature is -5mv/cell/°C

Float use

1. Limit the initial charging current to no more than 3.6A
2. Keep charging voltage at 20.25-20.7V/unit.When the voltage reaches the constant voltage,the current gradually decreases until the battery is fully charged and continues to charge
3. The compensation coefficient of charging voltage and temperature is -3mv/cell/°C



Kaiying Power Supply & Electrical Equip Co., Ltd

Email: sales@longwaybattery.com

Tel:0595-68782266 Fax:0595-68782222

Website: <http://www.longwaybattery.com>

Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
KY-IOP-LW18-12 B0. May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery. Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.




General VRLA Battery

9FM12 (18V12Ah)


Floating Charging Life VS Temperature



Floating Charging Characteristics Diagram

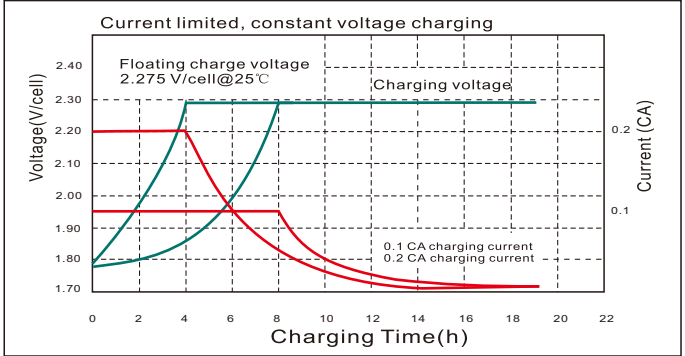

Cycle Life

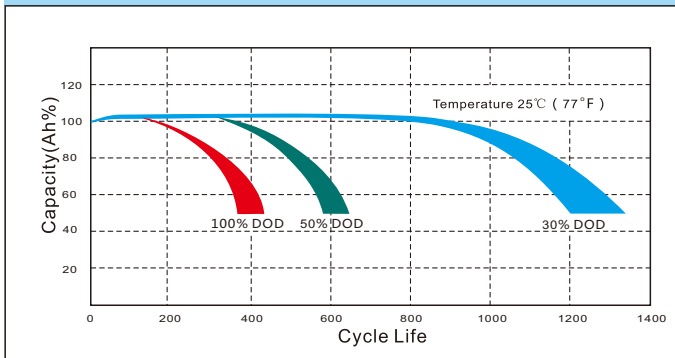

Cycle charging characteristic diagram



Temperature and capacity characteristics



Self-discharge characteristic



Constant current characteristics(A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
14.40	45.6	30.0	21.6	13.2	8.22	5.82	4.32	3.23	2.13	1.16	0.65
14.85	44.2	29.1	21.0	12.8	7.97	5.70	4.28	3.20	2.11	1.15	0.64
15.30	43.3	28.5	20.7	12.7	7.89	5.59	4.26	3.18	2.10	1.15	0.64
15.75	42.0	27.6	19.9	12.1	7.56	5.47	4.22	3.15	2.08	1.14	0.64
16.20	40.7	26.8	19.7	12.0	7.50	5.35	4.17	3.12	2.06	1.14	0.64

Constant power discharge characteristic (W,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
14.40	763	508	369	227	143	102	75.9	57.5	38.2	20.8	11.6
14.85	740	492	358	220	138	100	75.1	57.0	37.8	20.7	11.6
15.30	725	482	355	218	137	98.1	74.8	56.7	37.6	20.6	11.5
15.75	702	467	340	209	131	96.0	74.0	56.1	37.2	20.6	11.5
16.20	682	453	337	207	130	94.0	73.3	55.5	36.9	20.5	11.4



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-LW18-12 B0. May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery. Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.